

# The new alternate Phone Configuration.

Additional to the analogue Profiset family used in some regions, the Profiset 3030 will be the known Solution for the System Phone. Alternate, the optiPoint 500 (display) could be used instead of the Profiset 3030 as an System Phone. All optiPoint 500 including the optiPoint phone, analogue, acoustic, ISDN -Adapter will be available as high end user phones. A large number of optiPoint adapters are available to enable the flexible modification of workplaces to suit their respective requirements.



- optiPoint 500 entry.**
- Eight function keys with LEDs
  - Hands-free mode
  - Two control keys (+/-)
  - Suitable for wall-mounting
  - Colors: arctic, mangan



- optiPoint 500 economy.**
- As for optiPoint 500 entry, plus:
- Twelve function keys with LEDs
  - Pivoting alphanumeric LCD display showing two lines of 24 characters each
  - Three dialog keys for interactive menu (OK, Back, and Next)



- optiPoint 500 standard.**
- As for optiPoint 500 basic, plus:
- Hands-free operation with echo suppression



- optiPoint 500 basic.**
- As for optiPoint 500 economy, plus:
- Integrated USB 1.1 interface
  - One adapter port
  - An interface for connecting up to two Key modules



- optiPoint 500 advance.**
- As for optiPoint 500 standard, plus:
- 19 function keys with LEDs
  - Two adapter ports
  - Headset interface



- Profiset 3030**
- Mute
  - Redial
  - Music on hold
  - Hands-free mode
  - LCD display
  - 16 memories
  - 16 signal keys
  - Colors: arctic, mangan

## Fully straightforward – the convenient administration functions.

The HiPath 1100 telephone system supports you with many convenient functions for installation and operation.

- Administration by extension via MFV Phone
- Administration via V24 or USB or ISDN or ADSL
- Automatic in-service on all extensions
- (Automatic) remote software update from PC via internet and ISDN
- Country-specific configuration
- Remote administration



[www.siemens.com/hipath](http://www.siemens.com/hipath)

High-resolution data files for printing matters are available via Picture Management: [www.picturemanagement.de](http://www.picturemanagement.de)

© Siemens AG 2005 • Communications • Hofmannstr. 51 D-81359 München

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice. The trademarks used are owned by Siemens AG or their respective owners.



**SIEMENS**

Global network of innovation

HiPath 1100 – convenient communication for small and medium-sized companies.

[www.siemens.com/hipath](http://www.siemens.com/hipath)



# Communication that fits perfectly.

You manage a legal practice, or run a workshop? Perhaps you're a doctor or you manage a production company? You have a large number of customers, whom you know only over the phone, are always on call for your patients or are constantly in phone contact with your suppliers? If this is the case, you need a powerful telephone system that is future-proof, and that can be adapted perfectly to suit the size of your company. With HiPath 1100, Siemens offers you the right solution.

HiPath 1100 is the high performance phone family, made up of four systems, for companies with up to 140 users. With ADSL broadband access, HiPath 1100 offers tomorrow's communication technology. Integrated options, such as CLIP analog make your communication even more flexible. And HiPath 1100 is an especially cost-effective communications solution, not only in terms of purchase price, but also for installation and operation. It is especially simple to install and administer with the Windows Service Tool. New software ver-

sions are run via PC and the internet - conveniently and free of cost. Applications are straightforward to connect via the integrated V24 connection. And if your requirements change? No problem - with HiPath 1100 you can change up to ISDN at a later date. And HiPath 1100 phone systems always fit. The various models meet your requirements - from 16 to 140 users with between 6 and 32 lines. **HiPath 1100 - the smart phone system for demanding customers.**

## HiPath 1100 features.

### HiPath 1100 range - basic voice features

- Access category for night service
- Alarm announcement
- Association of caller number with HiPath 1100 speed dial name
- Auto attendant with announcement
- Auto hands free activation and deactivation on key sets
- Baby phone/paging with ext. access
- Call back - on busy and no answer
- Call barring with country default
- Caller list
- Call forwarding: internal/external
- Call hold /park
- Call group (default 1st 10 extension)

- Call pickup: group/selective
- CLIP info in each ext. CLIP phone
- CTI protocol via V.24/USB
- Conference
- Consultation with attendant console
- DISA Direct inward dialing
- Do not disturb
- DTMF suffix dialing
- Electronic lock
- Emergency call
- Event signaling (fax, printer)
- External dialing restriction
- External call diversion
- Extension name display
- Fax Gr. 3&4 Software

- Flash on trunk
- Hunt group (linear/cyclic)
- Music on hold
- MW on each CLIP device
- Night service
- Number redial
- Remote programming
- Programmable keys
- Sensor/relay features (1120 only)
- Speed dial central (90 x 30 long)
- Secretarial service (associated call)
- UCD statistical software
- Wake-up call
- VMIE - extended Voice Mail Interface

# Fully flexible - the wide range of configuration options.

Model	Co-Trunk analogue	Extensions		UPoE
	Min.	a/b	c/d3)	
1120	2-6	8-16	4	4
1150	2-16	10-50	8	8
1190	8-32	10-140	8-24	8

Channels in Options				
Model	ISDN	ADSL	TME1 digital	EVM Baby board
1120	2	1	-	1
1150	2-10	1	20	1
1190	2-10	1	45	1

- HiPath 1120 only
- ADSL or ISDN (all Models)
- Out of total number of Extension only w/o ADSL or ISDN Option and 2 EB 20x
- TME1 Board(s) with Channel for HiPath 1150 1x20 HiPath 1190 up to 1x15+1x30
- UPoE HiPath 1120 4 all others max. 8



## At a glance - HiPath 1100 V6.0 technical data.

### Technical Data

Component	HiPath 1120	HiPath 1150	HiPath 1190
Basic box dimensions (MB)			
Length / Depth / Height	360 mm / 288 mm / 64,4 mm	470 mm / 370 mm / 100 mm	420 mm / 394 mm / 498 mm
Weight	1.2 kg	4.25 kg	22.5 kg
Electrical specifications of supply source (PSU)	110/127V: S30122-X7646-X100 230V: S30122-X7646-X	S30122-K7642-X1	S30122-X7642-X
Supply characteristics (Input)	220V/127mA 127V/331mA	110-230V, Full range/1.5A	110-230V, Full range/1.5A
Operation frequency	50/60Hz	50/60Hz	50/60Hz
Calling voltage	40 V <sub>ms</sub> (50/60Hz)	50 V <sub>AC</sub> + (50 V <sub>DC</sub> /2) +26.0 V <sub>DC</sub> 0.13 A/25Hz	50 V <sub>AC</sub> + (50 V <sub>DC</sub> /2) +26.0 V <sub>DC</sub> 0.13 A/25Hz



### Administration features

- Administration over ISDN/ADSL/USB/V24
- Automatic In-Service of all extensions
- Automatic Remote Software Update
- Connected Phone recognition and report
- D-Channel Tracing
- MIDI file playback for Music on Hold
- Remote administration with password

### Miscellaneous features

- Call Timer for limited conversation

### Sensors and Relays features (1120)

- Activation by consultation on hold
- Relays control and status check for: switch, toggle & mono-with acknowledge

### New and additional features V6.0

- Automatic flash time detection
  - Call forwarding conditional
  - CTI Interface upgrade
  - Entry Voice Mail
  - FAX/DID integrated
  - Internet access (through Dial-up Net)
  - LED Status display
  - More Powerful LCR & ACS improvements
  - Special COS for locked Station
  - U<sub>PoE</sub> Support
- ### PC-Software features
- CDR (call charge with export function)
  - Graphical LCR prog. tool (via Manager)
  - NDIS WAN Drv with dyn chn grouping

### Option ISDN features

- AOC Call Charge
- CCBS Call Complete to Busy Subscriber
- CFB Call Forward Busy
- CFNR Call Forward no reply
- CFU Call Forward Unconditional
- CLIP Calling Line Identity Presentation
- CLIR Calling Line Identity Restriction
- COLP Connected Line Presentation
- COLR Connected Line Restriction
- DID Direct Inward Dialing
- MSN Multiple Subscriber Numbering
- PMP Point to Multipoint
- PP Point to Point
- S<sub>0</sub> trunk lines supporting S<sub>0</sub> bus





**SIEMENS**

Global network of innovation

HiPath 1100 –  
convenient communication  
for small and medium-sized  
companies.

[www.siemens.com/hipath](http://www.siemens.com/hipath)

# Communication that fits perfectly.

You manage a legal practice, or run a workshop? Perhaps you're a doctor or you manage a production company? You have a large number of customers, whom you know only over the phone, are always on call for your patients or are constantly in phone contact with your suppliers? If this is the case, you need a powerful telephone system that is future-proof, and that can be adapted perfectly to suit the size of your company. With HiPath 1100, Siemens offers you the right solution.

HiPath 1100 is the high performance phone family, made up of four systems, for companies with up to 140 users. With ADSL broadband access, HiPath 1100 offers tomorrow's communication technology. Integrated options, such as CLIP analog make your communication even more flexible. And HiPath 1100 is an especially cost-effective communications solution, not only in terms of purchase price, but also for installation and operation. It is especially simple to install and administer with the Windows Service Tool. New software ver-

sions are run via PC and the internet - conveniently and free of cost. Applications are straightforward to connect via the integrated V24 connection. And if your requirements change? No problem - with HiPath 1100 you can change up to ISDN at a later date. And HiPath 1100 phone systems always fit. The various models meet your requirements - from 16 to 140 users with between 6 and 32 lines.

**HiPath 1100 - the smart phone system for demanding customers.**

## HiPath 1100 features.

### HiPath 1100 range - basic voice features

- Access category for night service
- Alarm announcement
- Association of caller number with HiPath 1100 speed dial name
- Auto attendant with announcement
- Auto hands free activation and deactivation on key sets
- Baby phone/paging with ext. access
- Call back - on busy and no answer
- Call barring with country default
- Caller list
- Call forwarding: internal/external
- Call hold /park
- Call group (default 1st 10 extension)

- Call pickup: group/selective
- CLIP info in each ext. CLIP phone
- CTI protocol via V.24/USB
- Conference
- Consultation with attendant console
- DISA Direct inward dialing
- Do not disturb
- DTMF suffix dialing
- Electronic lock
- Emergency call
- Event signaling (fax, printer)
- External dialing restriction
- External call diversion
- Extension name display
- Fax Gr. 3&4 Software

- Flash on trunk
- Hunt group (linear/cyclic)
- Music on hold
- MW on each CLIP device
- Night service
- Number redial
- Remote programming
- Programmable keys
- Sensor/relay features (1120 only)
- Speed dial central (90 x 30 long)
- Secretarial service (associated call)
- UCD statistical software
- Wake-up call
- VMle - extended Voice Mail Interface



### Administration features

- Administration over ISDN/ADSL/USB/V24
- Automatic In-Service of all extensions
- Automatic Remote Software Update
- Connected Phone recognition and report
- D-Channel Tracing
- MIDI file playback for Music on Hold
- Remote administration with password

### Miscellaneous features

- Call Timer for limited conversation

### Sensors and Relays features (1120)

- Activation by consultation on hold
- Relays control and status check for: switch, toggle & mono-with acknowledge

### New and additional features V6.0

- Automatic flash time detection
- Call forwarding conditional
- CTI Interface upgrade
- Entry Voice Mail
- FAX/DID integrated
- Internet access (through Dial-up Net)
- LED Status display
- More Powerful LCR & ACS improvements
- Special COS for locked Station
- U<sub>POIE</sub> Support

### PC-Software features

- CDR (call charge with export function)
- Graphical LCR prog. tool (via Manager)
- NDIS WAN Drv with dyn chn grouping

### Option ISDN features

- AOC Call Charge
- CCBS Call Complete to Busy Subscriber
- CFB Call Forward Busy
- CFNR Call Forward no reply
- CFU Call Forward Unconditional
- CLIP Calling Line Identity Presentation
- CLIR Calling Line Identity Restriction
- COLP Connected Line Presentation
- COLR Connected Line Restriction
- DID Direct Inward Dialing
- MSN Multiple Subscriber Numbering
- PMP Point to Multipoint
- PP Point to Point
- S<sub>0</sub> trunk lines supporting S<sub>0</sub> bus



# Fully flexible - the wide range of configuration options.




Model	Co-Trunk analogue		Extensions		UPoE
	Min.	a/b	c/d3		
1120	2-6	8-16	4	4	4
1150	2-16	10-50	8	8	8
1190	8-32	10-140	8-24	8	8

Channels in Options				
Model	ISDN	ADSL	TME1 digital	EVM Baby board
1120	2	1	-	1
1150	2-10	1	20	1
1190	2-10	1	45	1

1. HiPath 1120 only
2. ADSL or ISDN (all Models)
3. Out of total number of Extension only w/o ADSL or ISDN Option and 2 EB 20x
4. TME1 Board(s) with Channel for HiPath 1150 1x20 HiPath 1190 up to 1x15+1x30
5. UPoE HiPath 1120 4 all others max. 8

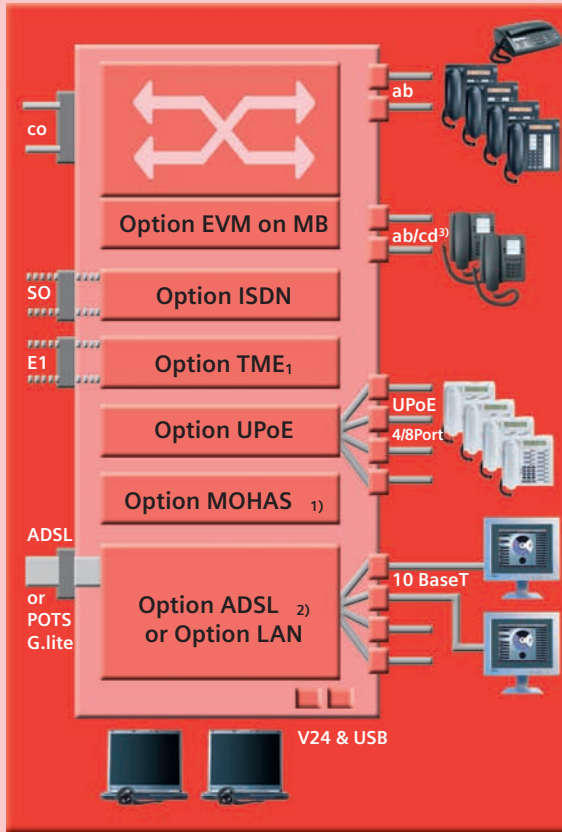

## At a glance - HiPath 1100 V6.0 technical data.

### Technical Data

Component	HiPath 1120	HiPath 1150	HiPath 1190
Basic box dimensions (MB)			
Length / Depth / Height	360 mm / 288 mm / 64,4 mm	470 mm / 370 mm / 100 mm	420 mm / 394 mm / 498 mm
Weight	1.2 kg	4.25 kg	22.5 kg
Electrical specifications of supply source (PSU)	110/127V: S30122-X7646-X100 230V: S30122-X7646-X	S30122-K7642-X1	S30122-X7642-X
Supply characteristics (Input)	220V/127mA 127V/331mA	110-230V, Full range/1.5A	110-230V, Full range/1.5A
Operation frequency	50/60Hz	50/60Hz	50/60Hz
Calling voltage	40 V <sub>ms</sub> (50/60Hz)	50 V <sub>AC+</sub> (50 V <sub>DC</sub> /2) +26.0 V <sub>DC</sub> 0.13 A/25Hz	50 V <sub>AC+</sub> (50 V <sub>DC</sub> /2) +26.0 V <sub>DC</sub> 0.13 A/25Hz



Environmental Conditions	Operation	Transport	Storage
Air temperature (°C)	0 to +40	-25 to +70	-5 to +45
Relative air humidity	60% to 25°C	90%	5% to 95%

# The new alternate Phone Configuration.

Additional to the analogue Profiset family used in some regions, the Profiset 3030 will be the known Solution for the System Phone. Alternate, the optiPoint 500 (display) could be used instead of the Profiset 3030 as an System Phone. All optiPoint 500 including the optiPoint phone, analogue, acoustic, ISDN -Adapter will be available as high end user phones. A large number of optiPoint adapters are available to enable the flexible modification of workplaces to suit their respective requirements.



#### optiPoint 500 entry.

- Eight function keys with LEDs
- Hands-free mode
- Two control keys (+/-)
- Suitable for wall-mounting
- Colors: arctic, mangan



#### optiPoint 500 economy.

As for optiPoint 500 entry, plus:

- Twelve function keys with LEDs
- Pivoting alphanumeric LCD display showing two lines of 24 characters each
- Three dialog keys for interactive menu (OK, Back, and Next)



#### optiPoint 500 standard.

As for optiPoint 500 basic, plus:

- Hands-free operation with echo suppression



#### optiPoint 500 basic.

As for optiPoint 500 economy, plus:

- Integrated USB 1.1 interface
- One adapter port
- An interface for connecting up to two Key modules



#### optiPoint 500 advance.

As for optiPoint 500 standard, plus:

- 19 function keys with LEDs
- Two adapter ports
- Headset interface



#### Profiset 3030

- Mute
- Redial
- Music on hold
- Hands-free mode
- LCD display
- 16 memories
- 16 signal keys
- Colors: arctic, mangan

## Fully straightforward – the convenient administration functions.

The HiPath 1100 telephone system supports you with many convenient functions for installation and operation.

- Administration by extension via MFV Phone
- Administration via V24 or USB or ISDN or ADSL

- Automatic in-service on all extensions
- (Automatic) remote software update from PC via internet and ISDN
- Country-specific configuration
- Remote administration

[www.siemens.com/hipath](http://www.siemens.com/hipath)

High-resolution data files for printing matters are available via Picture Management: [www.picturemanagement.de](http://www.picturemanagement.de)

© Siemens AG 2005 • Communications • Hofmannstr. 51  
D-81359 München

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice. The trademarks used are owned by Siemens AG or their respective owners.